











SELECT CASE SIZES AND OPTIONS. CUSTOM PARTS & BUILDS ARE AVAILABLE
FOR QUESTIONS, CALL 1.800.959.5050 • FOR A QUOTE CALL, FAX OR EMAIL





Handle material types may not be combined.

DS-ZDR-WARRIOR-201610

EIA UNITS in/mm A	BODY DEPTH in/mm B	RACK DEPTH in/mm C	COVER HEIGHT in/mm D+E	CASE HEIGHT in/mm F	VOL- UME cubic ft/m	WEIGHT lb/kg	SWAY +/-	ZERO PART #	NSN	WARRIOR ZDR 4U-6U
4U 7.12" (181 mm)	24/610	21/534	9/229	16.00/406	8.4/.24	54.0/24.5		ZDR042421-0303		WARRIOR ZDR Shock Mount includes a 19" Rack. All weights are approximate. Std load range: 20-80 lbs (9.1-36.3 kg) +/- = Sway space to be increased or decreased dependent on customer selection. ▼ = Decreased Sway Space QS = Quick-Ship is Available Drawing Specifications: Cover Height: 03 = 4.5 in (114.3 mm) (Exterior) 05 = 6.5 in (165.1 mm) Inside Depth: 03 = 3.0 in (76.2 mm) 05 = 5.0 in (127 mm) Case Width G = 27.25 in (692 mm)
			11/279		8.7/.25	55.0/24.9		ZDR042421-0305		
			13/330		9.2/.26	57.0/25.9		ZDR042421-0505		
		24/610	9/229		8.4/.24	54.0/24.5		ZDR042424-0303		
			11/279		8.7/.25	55.0/24.9		ZDR042424-0305		
			13/330		9.2/.26	57.0/25.9		ZDR042424-0505		
	27/686	24/610	9/229	16.00/406	9.1/.26	57.0/25.9		ZDR042724-0303	8145-01-582-5650	
			11/279		9.5/.27	58.0/26.3		ZDR042724-0305	8145-01-582-5666	
			13/330		10.0/.28	60.0/27.3		ZDR042724-0505		
		27/686	9/229		9.1/.26	57.0/25.9		ZDR042727-0303		
			11/279		9.5/.27	58.0/26.3		ZDR042727-0305		
			13/330		10.0/.28	60.0/27.3		ZDR042727-0505		
	30/762	27/686	9/229	16.00/406	9.8/.28	60.0/27.3		ZDR043027-0303	8145-01-582-5683	
			11/279		10.3/.29	61.0/27.7		ZDR043027-0305	8145-01-582-5684	
			13/330		10.8/.31	63.0/28.6		ZDR043027-0505		
		30/762	9/229		9.8/.28	60.0/27.3		ZDR043030-0303		
			11/279		10.3/.29	61.0/27.7		ZDR043030-0305		
			13/330		10.8/.31	63.0/28.6		ZDR043030-0505		
5U 8.87" (225 mm)	24/610	21/534	9/229	17.75/451	8.7/.25	64.0/29.5		ZDR052421-0303		   
			11/279		9.8/.28	65.0/30.0		ZDR052421-0305		
			13/330		10.2/.29	67.0/30.4		ZDR052421-0505		
		24/610	9/229		8.7/.25	64.0/29.5		ZDR052424-0303		
			11/279		9.8/.28	65.0/30.0		ZDR052424-0305		
			13/330		10.2/.29	67.0/30.4		ZDR052424-0505		
	27/686	24/610	9/229	17.75/451	9.8/.28	67.0/30.4		ZDR052724-0303	8145-01-582-5687	
			11/279		10.6/.30	68.0/30.9		ZDR052724-0305	8145-01-582-5690	
			13/330		11.1/.31	70.0/31.8		ZDR052724-0505		
		27/686	9/229		9.8/.28	67.0/30.4		ZDR052727-0303		
			11/279		10.6/.30	68.0/30.9		ZDR052727-0305		
			13/330		11.1/.31	70.0/31.8		ZDR052727-0505		
	30/762	27/686	9/229	17.75/451	10.9/.31	70.0/31.8		ZDR053027-0303	8145-01-582-5691	
			11/279		11.4/.32	71.0/32.2		ZDR053027-0305	8145-01-582-5435	
			13/330		12.0/.34	73.0/33.1		ZDR053027-0505		
		30/762	9/229		10.9/.31	70.0/31.8		ZDR053030-0303		
			11/279		11.4/.32	71.0/32.2		ZDR053030-0305		
			13/330		12.0/.34	73.0/33.1		ZDR053030-0505		
6U 10.63" (270 mm)	24/610	21/534	9/229	17.75/451	9.9/.28	60.0/27.2	+/-	ZDR062421-0303		Custom sizes and colors available on special order. Call 1.800.959.5050 ©2016 ZERO MANUFACTURING. ALL RIGHTS RESERVED. ZERO reserves the right to modify product specifications, features and information. Technical information is known to be correct at the time of publication.
			11/279		10.3/.29	61.0/27.7	+/-	ZDR062421-0305		
			13/330		11.1/.31	63.0/28.6	+/-	ZDR062421-0505		
		24/610	9/229		9.9/.28	60.0/27.2	+/-	ZDR062424-0303		
			11/279		10.3/.29	61.0/27.7	+/-	ZDR062424-0305		
			13/330		11.1/.31	63.0/28.6	+/-	ZDR062424-0505		
	27/686	24/610	9/229	17.75/451	10.8/.31	63.0/28.6	+/-	ZDR062724-0303	8145-01-582-5438	
			11/279		11.3/.32	64.0/29.1	+/-	ZDR062724-0305	8145-01-582-5447	
			13/330		12.0/.34	66.0/30.0	+/-	ZDR062724-0505		
		27/686	9/229		10.8/.31	63.0/28.6	+/-	ZDR062727-0303		
			11/279		11.3/.32	64.0/29.1	+/-	ZDR062727-0305		
			13/330		12.0/.34	66.0/30.0	+/-	ZDR062727-0505		
	30/762	27/686	9/229	17.75/451	11.7/.33	66.0/30.0	+/-	ZDR063027-0303	8145-01-582-5454	
			11/279		12.3/.35	67.0/30.4	+/-	ZDR063027-0305	8145-01-582-5460	
			13/330		12.9/.37	69.0/31.4	+/-	ZDR063027-0505		
		30/762	9/229		11.7/.33	66.0/30.0	+/-	ZDR063030-0303		
			11/279		12.3/.35	67.0/30.4	+/-	ZDR063030-0305		
			13/330		12.9/.37	69.0/31.4	+/-	ZDR063030-0505		

EIA UNITS in/mm A	BODY DEPTH in/mm B	RACK DEPTH in/mm C	COVER HEIGHT in/mm D+E	CASE HEIGHT in/mm F	VOL- UME cubic ft/m	WEIGHT lb/kg	SWAY +/-	ZERO PART #	NSN	WARRIOR ZDR 7U-10U
7U 12.37" (314 mm)	24/610	21/534	9/229	21.25/540	11.0/.31	64.0/29.0		ZDR072421-0303		WARRIOR ZDR Shock Mount includes a 19" Rack. All weights are approximate. Std load range: 20-80 lbs (9.1-36.3 kg) +/- = Sway space to be increased or decreased dependent on customer selection. ☒ = Decreased Sway Space QS = Quick-Ship is Available Drawing Specifications: Cover Height: 03 = 4.5 in (114.3 mm) (Exterior) 05 = 6.5 in (165.1 mm) Inside Depth: 03 = 3.0 in (76.2 mm) 05 = 5.0 in (127 mm) Case Width G = 27.25 in (692 mm)
			11/279		11.7/.33	65.0/29.4		ZDR072421-0305		
		24/610	13/330		12.4/.35	67.0/30.4		ZDR072421-0505		
			9/229		11.0/.31	64.0/29.0		ZDR072424-0303		
	27/686	24/610	11/279	21.25/540	11.7/.33	65.0/29.4		ZDR072424-0305		
			13/330		12.4/.35	67.0/30.4		ZDR072424-0505		
		27/686	9/229		12.0/.34	66.0/30.0		ZDR072724-0303	8145-01-582-5467	
			11/279		12.7/.36	67.0/30.4		ZDR072724-0305	8145-01-582-5476	
			13/330		13.4/.38	69.0/31.4		ZDR072724-0505		
			9/229		12.0/.34	66.0/30.0		ZDR072727-0303		
8U 14.12" (358 mm)	24/610	21/534	11/279	21.25/540	13.4/.38	69.0/31.4		ZDR072727-0305		
			13/330		13.4/.38	69.0/31.4		ZDR072727-0505		
		24/610	9/229		13.0/.37	68.0/30.9		ZDR073027-0303	8145-01-582-5488	
			11/279		13.7/.39	69.0/31.4		ZDR073027-0305	8145-01-582-5496	
	27/686	24/610	13/330	21.25/540	14.4/.41	71.0/32.2		ZDR073027-0505		
			9/229		13.0/.37	68.0/30.9		ZDR073030-0303		
		27/686	11/279		13.7/.39	69.0/31.4		ZDR073030-0305		
			13/330		14.4/.41	71.0/32.2		ZDR073030-0505		
		27/686	9/229		11.9/.34	69.0/31.4	+/-	ZDR082421-0303		
			11/279		12.6/.36	70.0/31.8	+/-	ZDR082421-0305		
9U 15.87" (403 mm)	24/610	21/534	13/330	21.25/540	13.4/.38	72.0/32.7	+/-	ZDR082421-0505		   
			9/229		11.9/.34	69.0/31.4	+/-	ZDR082424-0303		
		24/610	11/279		12.6/.36	70.0/31.8	+/-	ZDR082424-0305		
			13/330		13.4/.38	72.0/32.7	+/-	ZDR082424-0505		
	27/686	24/610	9/229	21.25/540	13.0/.37	71.0/32.2	+/-	ZDR082724-0303	8145-01-582-5218	
			11/279		13.7/.39	72.0/32.7	+/-	ZDR082724-0305	8145-01-582-5155	
		27/686	13/330		14.5/.41	74.0/33.6	+/-	ZDR082724-0505		
			9/229		13.0/.37	71.0/32.2	+/-	ZDR082727-0303		
			11/279		13.7/.39	72.0/32.7	+/-	ZDR082727-0305		
			13/330		14.5/.41	74.0/33.6	+/-	ZDR082727-0505		
10U 17.62" (448 mm)	24/610	21/534	9/229	21.25/540	14.1/.40	73.0/33.1	+/-	ZDR083027-0303	8145-01-582-5241	
			11/279		14.8/.42	74.0/33.6	+/-	ZDR083027-0305	8145-01-582-5278	
		24/610	13/330		15.6/.44	76.0/34.5	+/-	ZDR083027-0505		
			9/229		14.1/.40	73.0/33.1	+/-	ZDR083030-0303		
	27/686	27/686	11/279	21.25/540	14.8/.42	74.0/33.6	+/-	ZDR083030-0305		
			13/330		15.6/.44	76.0/34.5	+/-	ZDR083030-0505		
		30/762	9/229		12.2/.35	75.0/34.1		ZDR092421-0303		
			11/279		13.6/.38	76.0/34.5		ZDR092421-0305		
			13/330		14.3/.40	78.0/35.4		ZDR092421-0505		
			9/229		12.2/.35	75.0/34.1		ZDR092424-0303		
10U 17.62" (448 mm)	24/610	21/534	11/279	24.75/629	13.6/.38	76.0/34.5		ZDR092424-0305		03 Cover 05 Cover
			13/330		14.3/.40	78.0/35.4		ZDR092424-0505		
		24/610	9/229		13.7/.39	77.0/35.0		ZDR092724-0303	8145-01-582-5317	
			11/279		14.8/.42	78.0/35.4		ZDR092724-0305	8145-01-582-5325	
	27/686	27/686	13/330	24.75/629	15.6/.44	80.0/36.3		ZDR092724-0505		
			9/229		13.7/.39	77.0/35.0		ZDR092727-0303		
		30/762	11/279		14.8/.42	78.0/35.4		ZDR092727-0305		
			13/330		15.6/.44	80.0/36.3		ZDR092727-0505		
			9/229		15.2/.43	79.0/35.0		ZDR093027-0303	8145-01-582-5333	
			11/279		16.0/.45	80.0/35.4		ZDR093027-0305	8145-01-582-5339	
10U 17.62" (448 mm)	24/610	21/534	13/330	24.75/629	16.7/.47	82.0/36.6		ZDR093027-0505		Need Assistance? Call 1.800.959.5050 to speak to Sales and Quoting Service Reps or send an email to quotes@zerocases.com
			9/229		15.2/.43	79.0/35.0		ZDR093030-0303		
		24/610	11/279		16.0/.45	80.0/35.4		ZDR093030-0305		
			13/330		16.7/.47	82.0/36.6		ZDR093030-0505		
	27/686	24/610	9/229	24.75/629	13.7/.39	79.0/35.8	+/-	ZDR102421-0303		
			11/279		14.5/.41	80.0/36.2	+/-	ZDR102421-0305		
		27/686	13/330		15.5/.44	82.0/37.3	+/-	ZDR102421-0505		
			9/229		13.7/.39	79.0/35.8	+/-	ZDR102424-0303		
		30/762	11/279		14.5/.41	80.0/36.2	+/-	ZDR102424-0305		
			13/330		15.5/.44	82.0/37.3	+/-	ZDR102424-0505		
10U 17.62" (448 mm)	24/610	21/534	9/229	24.75/629	15.0/.42	81.0/36.8	+/-	ZDR102724-0303	8145-01-582-5129	©2016 ZERO MANUFACTURING. ALL RIGHTS RESERVED. ZERO reserves the right to modify product specifications, features and information. Technical information is known to be correct at the time of publication.
			11/279		15.8/.45	82.0/37.2	+/-	ZDR102724-0305	8145-01-582-5081	
		24/610	13/330		16.7/.47	84.0/38.2	+/-	ZDR102724-0505		
			9/229		15.0/.42	81.0/36.8	+/-	ZDR102727-0303		
	27/686	27/686	11/279	24.75/629	15.8/.45	82.0/37.2	+/-	ZDR102727-0305		
			13/330		16.7/.47	84.0/38.2	+/-	ZDR102727-0505		
		30/762	9/229		16.3/.46	83.0/37.6	+/-	ZDR103027-0303	8145-01-582-7460	
			11/279		17.1/.48	84.0/38.2	+/-	ZDR103027-0305	8145-01-582-7486	
			13/330		17.9/.51	86.0/39.1	+/-	ZDR103027-0505		
			9/229		16.3/.46	83.0/37.6	+/-	ZDR103030-0303		
10U 17.62" (448 mm)	24/610	21/534	11/279	24.75/629	17.1/.48	84.0/38.2	+/-	ZDR103030-0305		
			13/330		17.9/.51	86.0/39.1	+/-	ZDR103030-0505		
		24/610	9/229		17.1/.48	84.0/38.2	+/-	ZDR103030-0305		
			11/279		17.9/.51	86.0/39.1	+/-	ZDR103030-0505		

EIA UNITS in/mm A		BODY DEPTH in/mm B		RACK DEPTH in/mm C		COVER HEIGHT in/mm D+E		CASE HEIGHT in/mm F		VOL- UME cubic ft/m		WEIGHT lb/kg		SWAY +/-		ZERO PART #		NSN		WARRIOR ZDR 11U-15U	
11U 19.38" (492 mm)	24/610	21/534	9/229	28.25/718	14.7/42	80.0/36.2		ZDR112421-0303		WARRIOR ZDR Shock Mount includes a 19" Rack. All weights are approximate. Std load range: 20-80 lbs (9.1-36.3 kg) +/- = Sway space to be increased or decreased dependent on customer selection. ▼ = Decreased Sway Space QS = Quick-Ship is Available Drawing Specifications: Cover Height: 03 = 4.5 in (114.3 mm) (Exterior) 05 = 6.5 in (165.1 mm) Inside Depth: 03 = 3.0 in (76.2 mm) 05 = 5.0 in (127 mm) Case Width G = 27.25 in (692 mm)											
			11/279		15.6/44	81.0/36.6		ZDR112421-0305													
			13/330		16.5/47	83.0/37.6		ZDR112421-0505													
		24/610	9/229		14.7/42	80.0/36.2		ZDR112424-0303													
			11/279		15.6/44	81.0/36.6		ZDR112424-0305													
			13/330		16.5/47	83.0/37.6		ZDR112424-0505													
	27/686	24/610	9/229	28.25/718	16.0/45	82.0/37.2		ZDR112724-0303	8145-01-582-7491												
			11/279		16.9/48	83.0/37.6		ZDR112724-0305	8145-01-582-7683												
			13/330		17.8/50	85.0/38.6		ZDR112724-0505													
		27/686	9/229		16.0/45	82.0/37.2		ZDR112727-0303													
			11/279		16.9/48	83.0/37.6		ZDR112727-0305													
			13/330		17.8/50	85.0/38.6		ZDR112727-0505													
	30/762	27/686	9/229	28.25/718	17.3/49	84.0/38.2		ZDR113027-0303	8145-01-582-7690												
			11/279		18.2/52	85.0/38.6		ZDR113027-0305	8145-01-582-7725												
			13/330		19.1/54	87.0/39.5		ZDR113027-0505													
		30/762	9/229		17.3/49	84.0/38.2		ZDR113030-0303													
			11/279		18.2/52	85.0/38.6		ZDR113030-0305													
			13/330		19.1/54	87.0/39.5		ZDR113030-0505													
12U 21.25" (536 mm)	24/610	21/534	9/229	28.25/718	15.6/44	80.0/36.2	▼	ZDR122421-0303													
			11/279		16.5/47	81.0/36.6	▼	ZDR122421-0305													
			13/330		17.5/50	83.0/37.6	▼	ZDR122421-0505													
		24/610	9/229		15.6/44	80.0/36.2	▼	ZDR122424-0303													
			11/279		16.5/47	81.0/36.6	▼	ZDR122424-0305													
			13/330		17.5/50	83.0/37.6	▼	ZDR122424-0505													
	27/686	24/610	9/229	28.25/718	17.0/48	82.0/37.2	▼	ZDR122724-0303													
			11/279		17.9/51	83.0/37.6	▼	ZDR122724-0305													
			13/330		18.9/53	85.0/38.6	▼	ZDR122724-0505	6625-01-543-2932												
		27/686	9/229		17.0/48	82.0/37.2	▼	ZDR122727-0303													
			11/279		17.9/51	83.0/37.6	▼	ZDR122727-0305													
			13/330		18.9/53	85.0/38.6	▼	ZDR122727-0505													
	30/762	27/686	9/229	28.25/718	18.4/52	84.0/38.2	▼	ZDR123027-0303	8145-01-582-7730												
			11/279		19.3/55	85.0/38.6	▼	ZDR123027-0305	8145-01-582-7734												
			13/330		20.3/57	87.0/39.5	▼	ZDR123027-0505													
		30/762	9/229		18.4/52	84.0/38.2	▼	ZDR123030-0303													
			11/279		19.3/55	85.0/38.6	▼	ZDR123030-0305													
			13/330		20.3/57	87.0/39.5	▼	ZDR123030-0505													
14U 24.62" (625 mm)	24/610	21/534	9/229	33.50/785	17.2/49	85.0/38.6		ZDR142421-0303													
			11/279		18.4/52	86.0/39.1		ZDR142421-0305													
			13/330		19.3/55	88.0/40.0		ZDR142421-0505													
		24/610	9/229		17.2/49	85.0/38.6		ZDR142424-0303													
			11/279		18.4/52	86.0/39.1		ZDR142424-0305													
			13/330		19.3/55	88.0/40.0		ZDR142424-0505													
	27/686	24/610	9/229	33.50/785	18.9/53	87.0/39.5		ZDR142724-0303	8145-01-582-7898												
			11/279		20.0/57	88.0/40.0		ZDR142724-0305	8145-01-582-8177												
			13/330		21.0/59	90.0/40.9		ZDR142724-0505													
		27/686	9/229		18.9/53	87.0/39.5		ZDR142727-0303													
			11/279		20.0/57	88.0/40.0		ZDR142727-0305													
			13/330		21.0/59	90.0/40.9		ZDR142727-0505													
	30/762	27/686	9/229	33.50/785	20.6/58	89.0/40.5		ZDR143027-0303													
			11/279		21.6/61	90.0/40.9		ZDR143027-0305													
			13/330		22.7/64	92.0/41.8		ZDR143027-0505	5895-01-552-9388												
		30/762	9/229		20.6/58	89.0/40.5		ZDR143030-0303													
			11/279		21.6/61	90.0/40.9		ZDR143030-0305													
			13/330		22.7/64	92.0/41.8		ZDR143030-0505													
15U 26.37" (670 mm)	24/610	21/534	9/229	33.50/851	18.4/52	85.0/38.7	▼	ZDR152421-0303													
			11/279		19.3/55	86.0/39.1	▼	ZDR152421-0305													
			13/330		20.6/58	88.0/40.0	▼	ZDR152421-0505													
		24/610	9/229		18.4/52	85.0/38.7	▼	ZDR152424-0303													
			11/279		19.3/55	86.0/39.1	▼	ZDR152424-0305													
			13/330		20.6/58	88.0/40.0	▼	ZDR152424-0505													
	27/686	24/610	9/229	33.50/851	20.0/57	87.0/39.5	▼	ZDR152724-0303	8145-01-582-8182												
			11/279		21.0/59	88.0/40.0	▼	ZDR152724-0305	8145-01-582-8187												
			13/330		22.2/63	90.0/40.9	▼	ZDR152724-0505													
		27/686	9/229		20.0/57	87.0/39.5	▼	ZDR152727-0303													
			11/279		21.0/59	88.0/40.0	▼	ZDR152727-0305													
			13/330		22.2/63	90.0/40.9	▼	ZDR152727-0505													
	30/762	27/686	9/229	33.50/851	21.6/61	89.0/40.5	▼	ZDR153027-0303	8145-01-582-8263												
			11/279		22.7/64	90.0/40.9	▼	ZDR153027-0305	8145-01-582-8276												
			13/330		23.8/67	92.0/41.8	▼	ZDR153027-0505													
		30/762	9/229		21.6/61	89.0/40.5	▼	ZDR153030-0303													
			11/279		22.7/64	90.0/40.9	▼	ZDR153030-0305													
			13/330		23.8/67	92.0/41.8	▼	ZDR153030-0505													



Need Assistance?
Call 1.800.959.5050
to speak to Sales and
Quoting Service Reps
or send an email to
quotes@zerocases.com

©2015 ZERO MANUFACTURING. ALL RIGHTS RESERVED.
ZERO reserves the right to modify product specifications, features and information. Technical information is known to be correct at the time of publication.



ZERO KNOWS

19" RACKMOUNT CASES

WARRIOR™ WITH REMOVABLE RACK

BUYERS GUIDE AND PART NUMBER BUILDER

SELECT CASE SIZES AND OPTIONS. CUSTOM PARTS & BUILDS ARE AVAILABLE
FOR QUESTIONS, CALL 1.800.959.5050, FOR A QUOTE CALL, FAX OR EMAIL

CASE NUMBER

ZDRR U SIZE BODY RACK FRONT REAR

U SIZE

- ☐ 04 4U
- ☐ 05 5U
- ☐ 07 7U

BODY DEPTH

- ☐ 27"
- ☐ 30"

RACK DEPTH

- ☐ 21 21"/534 mm
- ☐ 24 24"/610 mm
- ☐ 27 27"/686 mm
- ☐ 30 30"/762 mm

COVERS (INTERIOR DEPTH)

- ☐ 03 3"/76 mm
- ☐ 05 5"/127 mm

COLORS

- ☐ B - Black 27040
- ☐ DB - Dark Blue 25102
- ☐ DS - Desert Sand 33446
- ☐ FG - Forest Green 24052
- ☐ G - Gray 26270
- ☐ GG - Dark Green 34094
- ☐ M - Maroon PMS 202
- ☐ MB - Medium Blue 25190
- ☐ N - Natural
- ☐ NG - NATO Green RAL6014
- ☐ OD - Olive Drab 24097
- ☐ O - Orange 12197
- ☐ R - Red 21105
- ☐ W - White 27925
- ☐ XG - Green 34108
- ☐ Y - Yellow 23785

FED-STD-595 for reference.

SHOCK MOUNTS FOR EQUIPMENT WEIGHT

- ☐ 01 20 to 49 lbs▲ (9.1 to 22.2 kg)
- ☐ 02 50 to 80 lbs (22.7 to 36.3 kg)
- ☐ 03 81 to 150 lbs (36.8 to 68 kg)

Call for loads over 150 lbs.

ENVIRONMENT

- ☐ 00 - None
- ☐ HI - Humidity Indicator
- ☐ PV - Pressure Valve

COMBINATIONS

- ☐ PH - PV, HI
- ☐ WT - Watertight, and PV●
- ☐ WV - WT, HI, PV●

Watertight may not be combined with Locking Hasp.

RACK HOLES

- ☐ 00 - Standard EIA
- ☐ M5 - M5 Metric Tapped
- ☐ M6 - M6 Metric Tapped
- ☐ SQ - Square

SHELVES/DRAWERS

- ☐ 00 None Required
- ☐ EA Equipment Angles
- ☐ FS Fixed Shelf
- ☐ IR Intermediate Rails
- ☐ KT Keyboard Tray◆
- ☐ RS Rack Slides
- ☐ S2 2U Sliding Drawer
- ☐ S3 3U Sliding Drawer
- ☐ S4 4U Sliding Drawer
- ☐ SF Sliding Shelf

HARDWARE

- ☐ 00 Standard: Zinc Chromate Handle and Hardware
- ☐ LL Zinc Chromate Handle and Hardware, Locking Hasp●
- ☐ BH Black Metal Handle and Hardware
- ☐ BL Black Metal Handle, Hardware, Locking Hasp●
- ☐ P0 Plastic Black Handle, Zinc Hardware
- ☐ PB Plastic Black Handle, Black Hardware
- ☐ PS Plastic Black Handle, Stainless Steel Hardware
- ☐ P1 Plastic Black Handle, Zinc Hardware, Locking Hasp●
- ☐ P2 Plastic Black Handle, Stainless Steel Hardware, Locking Hasp●
- ☐ P3 Plastic Black Handle, Black Hardware, Locking Hasp●
- ☐ SS Stainless Steel Handle and Hardware
- ☐ LS Stainless Steel Handle and Hardware, Locking Hasp●

Handle material types may not be combined.

OTHER OPTIONS

- ☐ 00 - None Required
- ☐ CA - 4 Removable Casters
- ☐ CB - 4 Removable Brake Casters
- ☐ CH - Card Holder
- ☐ CR - Chair◆
- ☐ CS - Coupling Straps
- ☐ LR - Lifting/Tie Down Rings
- ☐ SP - Storage Pouch
- ☐ TB - Table◆

COMBINATIONS

- ☐ Z1 - CH, SP
- ☐ Z2 - CA, CS
- ☐ Z3 - CA, CH, CS, SP
- ☐ Z4 - CA, CH, CS, LR, SP
- ☐ Z5 - CH, LR
- ☐ Z6 - CS, SP
- ☐ ZC - CA, LR
- ☐ ZD - CA, CH, LR
- ☐ ZE - CA, CH, LR, SP
- ☐ ZF - CA, SP

THE ZERO WARRIOR™ REMOVABLE RACK CASE is a rotomolded, double entry case designed and engineered to provide complete protection for the most sensitive E.I.A 19" rackmountable equipment and instrumentation.

The Removable Rackmount Case meets the rigors of virtually all conditions including extreme altitude, rain, sleet, snow, sand, temperatures, and dust.

KEY FEATURES

- Shock-mounted Removable Rack
- Flexibility to build to custom needs
- Strong, lightweight polyethylene construction
- Portable, stackable and rugged
- Variety of standard & custom finishes and colors

STANDARD RACKFRAME LOAD RANGES

Shock Mounts per System	Load Ranges (lbs/kg) for Equipment Installed in Rack Frame
8 ea	20 to 49 lbs / 9.1 to 22.2 kg
8 ea	50 to 80 lbs / 22.7 to 36.3 kg
8 ea	81 to 150 lbs / 36.8 to 68.1 kg

REFERENCE TABLE BELOW



Call 1.800.500.9376 for engineering and design assistance to meet custom and specific requirements.

Certified
ISO 9001:2008
AS9100 Rev. C



www.zerocases.com

Lifting Rings: Verify the application does not exceed the load carrying capacity of the lifting rings or case.

Stacking: Verify weight and support.

Shock Mounts: Equipment loads over 150 lbs (68 kg).

NOTES:

- Watertight Valve not available with Locking Hasps.
- ◆ Requires additional lead time for cut'n weld body case.
- ◆ Not available when case body depth equals rack frame.

HOW TO ORDER CASES

STANDARD CASES

- Go to www.zerocases.com/contact-us.html to find your local distributor or reseller.
- Call 800-959-5050 or email orders@zerocases.com to place an order directly with ZERO.

CUSTOM CASES

- Go to www.zerocases.com/contact-us.html to find your local representative and request a quote or email your RFQ to quotes@zerocases.com.

ZERO MANUFACTURING | 500 West 200 North, North Salt Lake, Utah 84054 USA

Toll Free US +1 800-500-ZERO (9376) | Direct +1 801-298-5900 | Fax +1 801-299-7389

Email sales@zerocases.com | Web www.zerocases.com

ZERO KNOWS

19" RACKMOUNT CASE WITH REMOVABLE RACK

SELECT CASE SIZE AND OPTIONS

CALL 1.800.500.ZERO (9376)

FAX 1.801.292.9450

TO LEARN MORE VISIT ABOUT ZERO CASES

VISIT WWW.ZEROCASES.COM

EZ-Glide™
Nylon Rails

Heavy Duty
Handles

Pressure
Relief Valve

Rugged Steel Rails

WARRIOR™ ZDRR 4U-7U

EIA UNITS in/mm A	BODY DEPTH in/mm B	RACK DEPTH in/mm C	COVER HEIGHT in/mm D + E	CASE HEIGHT in/mm F	VOLUME cubic ft/m	WEIGHT lb/kg	SWAY +/-	ZERO PART#	NSN
----------------------------	-----------------------------	-----------------------------	-----------------------------------	------------------------------	----------------------	-----------------	-------------	---------------	-----

WARRIOR ZDRR includes a
Removable, Shock Mount 19" Rack.

All weights are approximate.

Std load range: 20-80 lbs (9.1-36.3 kg)

+/- = Sway space to be increased or
decreased dependent on selection.

Drawing Specifications:

Cover Height: 03 = 4.5 in (114.3 mm)

(Exterior) 05 = 6.5 in (165.1 mm)

Inside Depth: 03 = 3.0 in (76.2 mm)





05 = 5.0 in (127 mm)

Case Width G = 27.25 in (692 mm)

4U
12.37"
(314 mm)

5U
12.37"
(314 mm)

7U
12.37"
(314 mm)



ZERO
www.zerocases.com

©2016 ZERO MANUFACTURING. ALL RIGHTS
RESERVED. ZERO reserves the right to
modify product specifications, features and
information. Technical information is known
to be correct at the time of publication.



19" WARRIOR™ WITH REMOVABLE RACK STANDARD FEATURES

Standard Removable
Sliding 19" Rack Frame
27" and 30" Body Depths
Removable Side Cover
Zinc Chrome Latches
Recessed Handles
Stacking Ribs
Grounding Strap
16 Color Selections



ZERO KNOWS

19" RACKMOUNT SERIES

WARRIOR™ STORAGE CASE

BUYERS GUIDE AND PART NUMBER BUILDER

SELECT CASE SIZES AND OPTIONS. CUSTOM PARTS & BUILDS ARE AVAILABLE
FOR QUESTIONS, CALL 1.800.959.5050, FOR A QUOTE CALL, FAX OR EMAIL

CASE NUMBER

ZDC **U SIZE** **BODY** **FRONT** **REAR** **00** **00** **00** **00** **00**

U SIZE
☐ 04 - 4U
☐ 05 - 5U
☐ 07 - 7U
☐ 09 - 9U
☐ 11 - 11U
☐ 14 - 14U

BODY DEPTH
☐ 24"
☐ 27"
☐ 30"

COVERS (INTERIOR DEPTH)
☐ 03 - 3"/76 mm
☐ 05 - 5"/127 mm

COLORS
☐ B - Black 27040
☐ DB - Dark Blue 25102
☐ DS - Desert Sand 33446
☐ FG - Forest Green 24052
☐ G - Gray 26270
☐ GG - Dark Green 34094
☐ M - Maroon PMS 202
☐ MB - Medium Blue 25190
☐ N - Natural
☐ NG - NATO Green RAL6014
☐ OD - Olive Drab 24097
☐ O - Orange 12197
☐ R - Red 21105
☐ W - White 27925
☐ XG - Green 34108
☐ Y - Yellow 23785
FED-STD-595 for reference.

ENVIRONMENT
☐ 00 - None Required
☐ HI - Humidity Indicator
☐ PV - Pressure Valve
COMBINATIONS
☐ PH - PV, HI
☐ WT - Watertight, PV
☐ WV - WT, HI, PV
Watertight may not be combined with Locking Hasp.

SHOCK MOUNTS
☐ 00 - None Required

HARDWARE
☐ 00 - Standard: Zinc Chromate Handle and Hardware
☐ LL - Zinc Chromate Handle and Hardware, Locking Hasp
☐ BH - Black Metal Handle and Hardware
☐ BL - Black Metal Handle, Hardware, Locking Hasp
☐ P0 - Plastic Black Handle, Zinc Hardware
☐ PB - Plastic Black Handle, Black Hardware
☐ PS - Plastic Black Handle, Stainless Steel Hardware
☐ P1 - Plastic Black Handle, Zinc Hardware, Locking Hasp
☐ P2 - Plastic Black Handle, Stainless Steel Hardware, Locking Hasp
☐ P3 - Plastic Black Handle, Black Hardware, Locking Hasp
☐ SS - Stainless Steel Handle and Hardware
☐ LS - Stainless Steel Handle and Hardware, Locking Hasp
Handle material types may not be combined.

RACK HOLES
☐ 00 - None Available

SHELVES/DRAWERS
☐ 00 - None Available

OTHER OPTIONS
☐ 00 - None Required
☐ CA Removable Casters (4)
☐ CB Removable Brake Casters (4)
☐ CH - Card Holder
☐ CR - Chair
☐ CS - Coupling Straps
☐ LR - Lifting/Tie Down Rings
☐ SP - Storage Pouch
☐ TB - Table
COMBINATIONS
☐ Z1 - CH, SP
☐ Z2 - CA, CS
☐ Z3 - CA, CH, CS, SP
☐ Z4 - CA, CH, CS, LR, SP
☐ Z5 - CH, LR
☐ Z6 - CS, SP
☐ ZC - CA, LR
☐ ZD - CA, CH, LR
☐ ZE - CA, CH, LR, SP
☐ ZF - CA, SP

WARRIOR ZDC is a rotomolded, double entry case, designed and engineered for your storage needs. The Warrior Case meets the rigors of virtually all conditions including extreme altitude, rain, sleet, snow, sand, temperatures, and dust.

WARRIOR KEY FEATURES AND BENEFITS

- Flexibility to build to custom needs
- Strong, lightweight polyethylene construction
- Variety of standard and custom finishes and colors
- Portable, stackable and versatile.
- Meets applicable ATA 300, Category 1 Specification
- Stack with Warrior cases without removing caster plates



www.zerocases.com

Certified
ISO 9001:2008
AS9100 Rev. C



Call
1.800.500.9376
for engineering
and design
assistance to meet
custom and specific
requirements.

Lifting Rings: Call to verify the application does not exceed the load carrying capacity of the lifting rings or case.

Stacking: Call to verify weight and support.

NOTES:

- Watertight not available with Locking Hasps.
- Requires additional lead time for cut and weld body case to create 24" body depth.

HOW TO ORDER CASES

STANDARD CASES

- Go to www.zerocases.com/contact-us.html to find your local distributor or reseller.
- Call 800-959-5050 or email orders@zerocases.com to place an order directly with ZERO.

CUSTOM CASES

- Go to www.zerocases.com/contact-us.html to find your local representative and request a quote or email your RFQ to quotes@zerocases.com.

ZERO MANUFACTURING | 500 West 200 North, North Salt Lake, Utah 84054 USA

Toll Free US +1 800-500-ZERO (9376) | Direct +1 801-298-5900 | Fax +1 801-299-7389

Email sales@zerocases.com | Web www.zerocases.com

WARRIOR ZDC 4U-14U

ZERO KNOWS 19" RACKMOUNT SERIES WARRIOR™ STORAGE CASE

CALL 1.800.500.ZERO (9376)
FAX 1.801.292.9450
VISIT WWW.ZEROCASES.COM

CONVENIENT STORAGE CASES TO MATCH ZERO'S WARRIOR LINE OF SHOCKMOUNT CASES

TO ORDER ZERO'S WARRIOR CASES
SELECT CASE SIZE AND OPTIONS
USING THE PART NUMBER BUILDER
CALL TODAY FOR CUSTOM ORDERS


Need a special configuration?
Size? Color? ZERO's engineers
and designers can modify or
create original designs to meet
your specifications.

WARRIOR ZDC Case is without a rack.
All weights are approximate.
Drawing Specifications:

Cover Height: 03 = 4.5 in (114.3 mm)
(Exterior) 05 = 6.5 in (165.1 mm)

Inside Depth: 03 = 3.0 in (76.2 mm)
05 = 5.0 in (127 mm)

Case Width G = 27.25 in (692 mm)

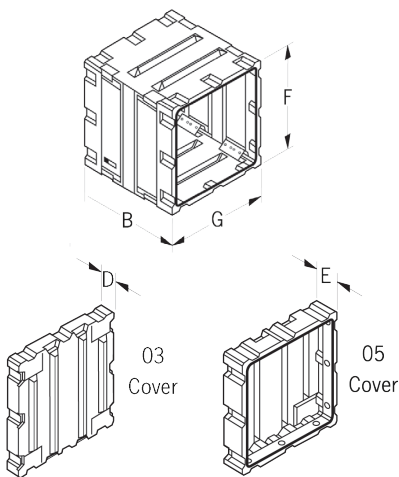

ZERO
www.zerocases.com

©2016 ZERO MANUFACTURING. ALL RIGHTS RESERVED.
ZERO reserves the right to modify product specifications,
features and information. Technical information is known to be
correct at the time of publication.

EIA UNITS in/mm A	BODY DEPTH in/mm B	COVER HEIGHT in/mm D + E	CASE HEIGHT in/mm F	VOLUME cubic ft/m	WEIGHT lb/kg	ZERO PART#	NSN
4U 7.12" (181 mm)	24/610	9/229	16.00/406	8.4/.24	49/22.2	ZDC0424-0303	
		11/279		8.7/.25	50/22.8	ZDC0424-0305	
		13/330		9.2/.26	52/23.6	ZDC0424-0505	
	27/686	9/229	16.00/406	9.1/.26	52/23.6	ZDC0427-0303	8145-01-582-5723
		11/279		9.5/.27	53/24.0	ZDC0427-0305	
		13/330		10.0/.28	55/25.0	ZDC0427-0505	
	30/762	9/229	16.00/406	9.8/.28	55/25.0	ZDC0430-0303	8145-01-582-5748
		11/279		10.3/.29	56/25.4	ZDC0430-0305	
		13/330		10.8/.31	58/26.3	ZDC0430-0505	
5U 8.87" (225 mm)	24/610	9/229	17.75/451	8.7/.25	59/26.8	ZDC0524-0303	
		11/279		9.8/.28	60/27.2	ZDC0524-0305	
		13/330		10.2/.29	62/28.1	ZDC0524-0505	
	27/686	9/229	17.75/451	9.8/.28	62/28.1	ZDC0527-0303	8145-01-582-5763
		11/279		10.6/.30	63/28.6	ZDC0527-0305	
		13/330		11.1/.31	65/29.5	ZDC0527-0505	
	30/762	9/229	17.75/451	10.9/.31	65/29.5	ZDC0530-0303	8145-01-582-5778
		11/279		11.4/.32	66/30.0	ZDC0530-0305	
		13/330		12.0/.34	68/30.9	ZDC0530-0505	
7U 12.37" (314 mm)	24/610	9/229	21.25/540	11.0/.31	59/26.8	ZDC0724-0303	
		11/279		11.7/.33	60/27.2	ZDC0724-0305	
		13/330		12.4/.35	62/28.1	ZDC0724-0505	
	27/686	9/229	21.25/540	12.0/.34	61/27.7	ZDC0727-0303	8145-01-582-5784
		11/279		12.7/.36	62/28.1	ZDC0727-0305	
		13/330		13.4/.38	64/29.1	ZDC0727-0505	
	30/762	9/229	21.25/540	13.0/.37	63/28.6	ZDC0730-0303	8145-01-582-5970
		11/279		13.7/.39	64/29.1	ZDC0730-0305	
		13/330		14.4/.41	66/30.0	ZDC0730-0505	
9U 15.87" (403 mm)	24/610	9/229	24.75/629	12.2/.35	69/31.3	ZDC0924-0303	
		11/279		13.6/.38	70/31.8	ZDC0924-0305	
		13/330		14.3/.40	72/32.7	ZDC0924-0505	
	27/686	9/229	24.75/629	13.7/.39	71/32.2	ZDC0927-0303	8145-01-582-5980
		11/279		14.8/.42	72/32.7	ZDC0927-0305	
		13/330		15.6/.44	74/33.6	ZDC0927-0505	
	30/762	9/229	24.75/629	15.2/.43	73/33.1	ZDC0930-0303	8145-01-582-5988
		11/279		16.0/.45	74/33.6	ZDC0930-0305	
		13/330		16.7/.47	76/34.5	ZDC0930-0505	
11U 19.38" (492 mm)	24/610	9/229	28.25/718	14.7/.42	74/33.6	ZDC1124-0303	
		11/279		15.6/.44	75/34.1	ZDC1124-0305	
		13/330		16.5/.47	77/35.0	ZDC1124-0505	
	27/686	9/229	28.25/718	16.0/.45	76/34.5	ZDC1127-0303	8145-01-582-6049
		11/279		16.9/.48	77/35.0	ZDC1127-0305	
		13/330		17.8/.50	79/35.9	ZDC1127-0505	
	30/762	9/229	28.25/718	17.3/.49	78/35.4	ZDC1130-0303	8145-01-582-6058
		11/279		18.2/.52	79/35.9	ZDC1130-0305	
		13/330		19.1/.54	81/36.8	ZDC1130-0505	
14U 24.62" (625 mm)	24/610	9/229	33.50/851	17.2/.49	78/35.4	ZDC1424-0303	
		11/279		18.4/.52	79/36.0	ZDC1424-0305	
		13/330		19.3/.55	81/36.8	ZDC1424-0505	
	27/686	9/229	33.50/851	18.9/.53	80/36.3	ZDC1427-0303	8145-01-582-5596
		11/279		20.0/.57	81/36.8	ZDC1427-0305	
		13/330		21.0/.59	83/37.6	ZDC1427-0505	
	30/762	9/229	33.50/851	20.6/.58	82/37.2	ZDC1430-0303	8145-01-582-5603
		11/279		21.6/.61	83/37.6	ZDC1430-0305	
		13/330		22.7/.64	85/38.6	ZDC1430-0505	